


POLYCAB MV AL BS 7835 19/33 KV

Medium Voltage Armoured Cable, 19/33 (36) KV AC

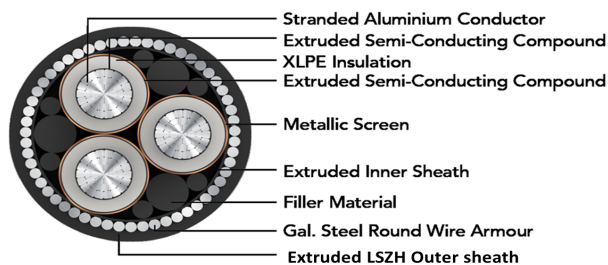

Images not to scale. Follow table for dimensions

APPLICATION

POLYCAB MV AL BS 7835 19/33 KV XLPE insulated with aluminium conductor single & multi core cable is designed for low smoke & low halogen evolution and this suitable to use for power networks, underground and in cable ducting.

CHARACTERISTICS

Voltage Rating

Nominal Voltage: 19/33 (36) kV

Operation Temperature

Max. operating temperature: +90°C

Max. Short Circuit Temperature: 250°C

Bending Radius:

Single core cable

Fixed Installation: 15 x Overall diameter

Three core cable

Fixed Installation: 12 x Overall diameter

CONSTRUCTION

- Conductor: Circular Compacted aluminium conductor as per BS EN/IEC 60228, class 2
- Conductor Screen: Extruded Semi-conductive compound
- Insulation: XLPE as per BS 7655-1.3 or EPR as per BS 7655-1.2
- Non-Metallic Insulation Screen: Extruded Semi-conductive compound
- Metallic Insulation Screen: Copper tape screen
- Inner Covering: Extruded LSZH (Low Smoke Zero Halogen) compound
- Armour:
 - Single Core: Aluminium Round Wire Armoured (AWA)
 - Multi Core: Galvanised Steel Round Wire Armoured (SWA)
- Outer Sheath: Extruded LSZH compound as per BS 7655-6.1, Colour: Black

Test Voltage

76kV AC

Impulse Test Voltage

Peak 194kV AC

OUTSTANDING FEATURES

- Flame retardant
- High life
- UV resistant
- Oil resistant
- Low smoke emission

STANDARD FOLLOWS

BS EN/IEC 60228

BS 7655-1.3/1.2

BS 7655-6.1

BS 7835

COMPLIANCE

Conductor resistance BS EN/IEC 60228

Insulation resistance BS 7835

Flame Retardant test BS EN/IEC 60332-1-2

Partial Discharge test BS 7835

Smoke Emission test BS EN/IEC 61034-2

OUR ACCREDITATIONS



APPROVAL



POLYCAB MV AL BS 7835 19/33 KV
Medium Voltage Armoured Cable, 19/33 (36) KV AC



WEIGHT & DIMENSION DATA :

Product Code	No. of Cores	Nominal Cross sectional Area mm ²	Nominal Diameter			Weight (Approx.) Kg/Km
			Under armour mm	Over armour Mm	Overall mm	
MVBS20AXAWLS001C070S	1	70	30.4	34.4	39.0	1750
MVBS20AXAWLS001C095S	1	95	32.2	36.2	41.0	1950
MVBS20AXAWLS001C120S	1	120	33.8	37.8	42.0	2150
MVBS20AXAWLS001C150S	1	150	35.5	39.5	44.0	2300
MVBS20AXAWLS001C185S	1	185	37.2	42.2	47.0	2650
MVBS20AXAWLS001C240S	1	240	40.0	45.0	50.0	3050
MVBS20AXAWLS001C300S	1	300	42.5	47.5	53.0	3450
MVBS20AXAWLS001C400S	1	400	45.7	50.7	56.0	3900
MVBS20AXAWLS001C500S	1	500	49.0	54.0	60.0	4450
MVBS20AXAWLS001C630S	1	630	52.8	57.8	64.0	5150
MVBS20AXAWLS001C800S	1	800	56.9	61.9	68.0	5950
MVBS20AXAWLS001C01KS	1	1000	61.2	66.2	72.0	6800
MVBS20AXSWLS003C070S	3	70	64.3	70.6	77.0	8800
MVBS20AXSWLS003C095S	3	95	68.1	74.4	81.0	9600
MVBS20AXSWLS003C120S	3	120	71.5	77.8	85.0	10400
MVBS20AXSWLS003C150S	3	150	75.2	81.5	89.0	11250
MVBS20AXSWLS003C185S	3	185	78.8	85.1	93.0	12200
MVBS20AXSWLS003C240S	3	240	84.2	90.5	99.0	13550
MVBS20AXSWLS003C300S	3	300	90.0	96.3	105.0	15200
MVBS20AXSWLS003C400S	3	400	96.9	103.2	112.0	17250
MVBS20AXSWLS003C500S	3	500	104.0	110.3	120.0	19500
MVBS20AXSWLS003C630S	3	630	111.3	117.6	127.0	22000

Electrical Characteristics:

No. of Cores	Nominal Cross sectional Area	Max. DC Resistance at 20°C	Max. AC Resistance at 90°C	Short circuit current rating	Capacitance (Approx.)	Inductance (Approx.)	Reactance (Approx.)
	mm ²	Ω/km	Ω/km	kA/s	μF/km	mH/km	Ω/km
1	70	0.443	0.568	6.61	0.15	0.45	0.14
1	95	0.320	0.411	8.98	0.16	0.43	0.13

POLYCAB MV AL BS 7835 19/33 KV

Medium Voltage Armoured Cable, 19/33 (36) KV AC

No. of Cores	Nominal Cross sectional Area mm ²	Max. DC Resistance at 20°C Ω/km	Max. AC Resistance at 90°C Ω/km	Short circuit current rating kA/s	Capacitance (Approx.) μF/km	Inductance (Approx.) mH/km	Reactance (Approx.) Ω/km
1	120	0.253	0.325	11.34	0.18	0.41	0.13
1	150	0.206	0.265	14.17	0.19	0.40	0.12
1	185	0.164	0.211	17.48	0.21	0.39	0.12
1	240	0.125	0.161	22.68	0.23	0.37	0.12
1	300	0.100	0.129	28.35	0.25	0.36	0.11
1	400	0.0778	0.101	37.79	0.28	0.35	0.11
1	500	0.0605	0.080	47.24	0.321	0.283	0.089
1	630	0.0469	0.063	59.52	0.350	0.274	0.086
1	800	0.0367	0.051	75.59	0.386	0.263	0.083
1	1000	0.0291	0.042	94.48	0.424	0.254	0.080
3	70	0.443	0.568	6.61	0.15	0.39	0.12
3	95	0.320	0.411	8.98	0.16	0.37	0.12
3	120	0.253	0.325	11.34	0.18	0.36	0.11
3	150	0.206	0.265	14.17	0.19	0.35	0.11
3	185	0.164	0.211	17.48	0.21	0.34	0.11
3	240	0.125	0.161	22.68	0.23	0.32	0.10
3	300	0.100	0.129	28.35	0.25	0.31	0.10
3	400	0.0778	0.101	37.79	0.28	0.30	0.09
3	500	0.0605	0.080	47.24	0.31	0.289	0.091
3	630	0.0469	0.063	59.52	0.33	0.281	0.088

POLYCAB MV AL BS 7835 19/33 KV

Medium Voltage Armoured Cable, 19/33 (36) KV AC

Current Carrying Capacity

No. of core	Nominal cross sectional area mm ²	Continues Current Rating					
		Buried direct in the ground		In single-way ducts		In air	
		Trefoil Amp.	Flat spaced Amp.	Trefoil ducts Amp.	Flat touching Amp.	Trefoil Amp.	Flat touching Amp.
1	70	186	192	176	178	230	236
1	95	221	229	210	213	280	287
1	120	252	260	240	242	324	332
1	150	281	288	267	271	368	376
1	185	317	324	303	307	424	432
1	240	367	373	351	356	502	511
1	300	414	419	397	402	577	586
1	400	470	466	451	457	673	676
1	500	483	450	415	367	746	705
1	630	536	489	458	396	847	787
1	800	586	525	513	434	953	868
1	1000	618	549	538	450	1038	936

Maximum conductor temperature 90°C
 Ambient air temperature 30°C
 Ground temperature 20°C
 Depth of laying 0.8 m
 Thermal resistivity of soil 1.5 K.m/W
 Thermal resistivity of earthenware ducts 1.2 K.m/W

De-rating factor

Current rating de-rating factors for other than 30°C ambient air temperature.

Air Temperature	20	25	35	40	45	50	55	60
De-rating factor	1.08	1.04	0.96	0.91	0.87	0.82	0.76	0.71

Current rating de-rating factors for other than 20°C ground temperature.

Ground Temperature	10	15	25	30	35	40	45	50
De-rating factor	1.07	1.04	0.96	0.93	0.89	0.85	0.8	0.76