


POLYCAB RR-P MC, IS 9968-1

Rubber control Cable, 1100 V AC

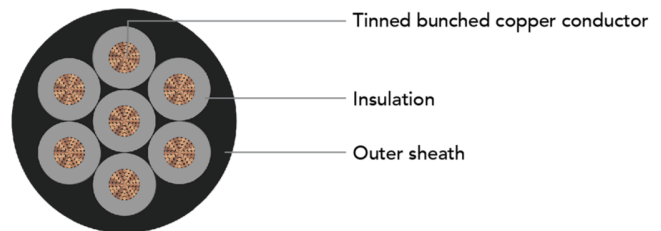

Images not to scale. Follow table for dimensions

APPLICATION

POLYCAB RR-P MC, IS 9968-1 tinned copper conductor, EPR insulated and PCP sheathed cable conforming to IS 9968-1 is designed to use for fixed wiring, single phase or three phase (earthed or unearthed) system for rated voltage up to and including 1100 V. These cables may be used on DC system for rated voltage grade 1500 V to earth. Suitable to use where heat and oil resistant is prime importance.

CHARACTERISTICS

Voltage Rating
1100 V

Operation Temperature
Fixed: -40°C to 90°C
Maximum short circuit temperature 250°C

Bending Radii
Fixed installation >12 x Overall Diameter
Occasional >10 x Overall Diameter

CONSTRUCTION

- Annealed tinned electrolytic grade copper conductor to IS 8130, class 5
- Insulated with elastomeric compound IE 2 to IS 6380
- Sheathed with elastomeric compound PCP (Polychloroprene) as per IS 6380.

Core Identification

Single core - Red/Black/White/Yellow/Blue
Twin core - Red, Black
Three core - Red, Yellow, Blue
Four core - Red, Yellow, Blue, Green
Five core - Red, Yellow, Blue, Black, Green
More than five core - Grey with Black numbering

Test Voltage
3000 V AC

STANDARD FOLLOWS

IS 8130:2013
IS 6380:1984*
IS 9968:1988

COMPLIANCE

Conductor resistance test IS 8130
Insulation resistance IS 6380:1984*
Flammability IEC 60332-1-2

OUR ACCREDITATIONS



APPROVAL



POLYCAB RR-P MC, IS 9968-1

Rubber control Cable, 1100 V AC

WEIGHT & DIMENSION DATA :

Product Code	Nominal cross sectional area	No. of core	Nominal thickness of insulation	Overall diameter
	mm ²		mm	mm
RCIS09TRUARP002C1.5SA002S	1.5	2	0.8	8
RCIS09TRUARP003C1.5SA002S	1.5	3	0.8	8.5
RCIS09TRUARP004C1.5SA002S	1.5	4	0.8	9.5
RCIS09TRUARP005C1.5SA002S	1.5	5	0.8	10.5
RCIS09TRUARP006C1.5SA002S	1.5	6	0.8	11.5
RCIS09TRUARP007C1.5SA002S	1.5	7	0.8	11.5
RCIS09TRUARP008C1.5SA002S	1.5	8	0.8	12.5
RCIS09TRUARP010C1.5SA002S	1.5	10	0.8	16
RCIS09TRUARP012C1.5SA002S	1.5	12	0.8	16.5
RCIS09TRUARP014C1.5SA002S	1.5	14	0.8	17.5
RCIS09TRUARP016C1.5SA002S	1.5	16	0.8	18.5
RCIS09TRUARP019C1.5SA002S	1.5	19	0.8	19.5
RCIS09TRUARP020C1.5SA002S	1.5	20	0.8	20.5
RCIS09TRUARP024C1.5SA002S	1.5	24	0.8	23
RCIS09TRUARP025C1.5SA002S	1.5	25	0.8	23
RCIS09TRUARP027C1.5SA002S	1.5	27	0.8	23.5
RCIS09TRUARP030C1.5SA002S	1.5	30	0.8	24
RCIS09TRUARP036C1.5SA002S	1.5	36	0.8	27
RCIS09TRUARP037C1.5SA002S	1.5	37	0.8	27
RCIS09TRUARP002C2.5SA002S	2.5	2	0.9	9.5
RCIS09TRUARP003C2.5SA002S	2.5	3	0.9	10
RCIS09TRUARP004C2.5SA002S	2.5	4	0.9	11.5
RCIS09TRUARP005C2.5SA002S	2.5	5	0.9	12.5
RCIS09TRUARP006C2.5SA002S	2.5	6	0.9	13.5
RCIS09TRUARP007C2.5SA002S	2.5	7	0.9	13.5
RCIS09TRUARP008C2.5SA002S	2.5	8	0.9	16
RCIS09TRUARP010C2.5SA002S	2.5	10	0.9	19
RCIS09TRUARP012C2.5SA002S	2.5	12	0.9	19.5
RCIS09TRUARP014C2.5SA002S	2.5	14	0.9	20.5
RCIS09TRUARP016C2.5SA002S	2.5	16	0.9	20.5
RCIS09TRUARP019C2.5SA002S	2.5	19	0.9	23

Document No.: 00235.Rev No.: 00 02-01-2024 / We reserve the rights to make technical changes.

POLYCAB RR-P MC, IS 9968-1

Rubber control Cable, 1100 V AC

Product Code	Nominal cross sectional area mm ²	No. of core	Nominal thickness of insulation mm	Overall diameter mm
RCIS09TRUARP020C2.5SA002S	2.5	20	0.9	24.5
RCIS09TRUARP024C2.5SA002S	2.5	24	0.9	27.5
RCIS09TRUARP025C2.5SA002S	2.5	25	0.9	27.5
RCIS09TRUARP027C2.5SA002S	2.5	27	0.9	28
RCIS09TRUARP030C2.5SA002S	2.5	30	0.9	30
RCIS09TRUARP036C2.5SA002S	2.5	36	0.9	32
RCIS09TRUARP037C2.5SA002S	2.5	37	0.9	32

Electrical characteristics

Current carrying capacity and maximum DC conductor resistance.

	2 Core Cable	3 Core Cable	
mm ²	Amp.	Amp.	Ω/km
1.5	26	23	13.7
2.5	36	32	8.21

Ambient temperature: 30°C

Conductor operating temperature: 90°C

Current carrying capacity in accordance with Table B.52.12 (free air) of IEC 60364 5-52

De-Rating Factor

De-rating factor at various ambient temperature

Temperature (°C)	20	30	40	50	60	70	80
Rating factor	1.08	1	0.91	0.82	0.71	0.58	0.41